

MENUMASTER[®] Commercial

Project #: _____

Item #: _____



Specialty Chef Line | Heavy Volume This category of microwave oven is ideal for...

Applications

- Quick service restaurants
- Fast Casual Restaurants
- Prep stations
- Casual dining
- Food courts

Through put potential

- Melts cheese on burgers in 8 seconds
- Heats spinach dip from frozen in 90 seconds
- Heats macaroni & cheese from frozen in 70 seconds

Location of oven(s)

- Kitchen shelf, single or back to back
- Kitchen counter, single or back to back

Defrost

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



Heavy Volume MenuMaster[®] Commercial OnCue[™] Series

Power Output


- 2400 Watts of power.
- Top and bottom magnetrons.

Increased Productivity

- Short cook times for single serving applications, up to 42% faster.
- Increased throughput by door automatically opening when cooking cycle is complete and remaining open until ready to cook.
- Closing door and pushing control pad is one operator motion.
- Door design does not interfere with kitchen flow.
- Small, "jigsaw" shaped footprint allows for back-to-back placement on a 724 mm (28 1/2") shelf using only 346 mm (13 5/8") of space.

Easy to Use and Maintain

- Control panel located on bottom for convenient access and angled for easy viewing.
- Plug and play operation.
- Door extends out for easy cleaning.
- Stainless steel exterior and interior for easy cleaning and increased durability.
- Constructed to withstand the foodservice environment.

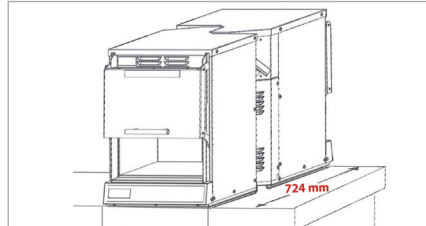

Two units fit back-to-back on a 724 mm (28 1/2") shelf in a 346 mm (13 5/8") space



Optional Accessories

- Non-stick baskets (SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10*, SH10*, CL10W**, PR10W**)
- Rail and Shelf Kit (RK10)

Service

All products are backed by the ACP, Inc.
24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, ETL EU, CE, Standards Association of Australia (SAA) Regulatory Compliance Mark (RCM) certified, and PSE.



*Only shipped in U.S.A.
** Only shipped in Europe



© 2022 ACP, Inc.
Cedar Rapids, Iowa 52404

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

800-233-2366

319-368-8120


Fax: 319-368-8198

www.acpsolutions.com

AIA File #:

Specification #:

MenuMaster® Commercial Microwave OnCue™ Series | Heavy Volume

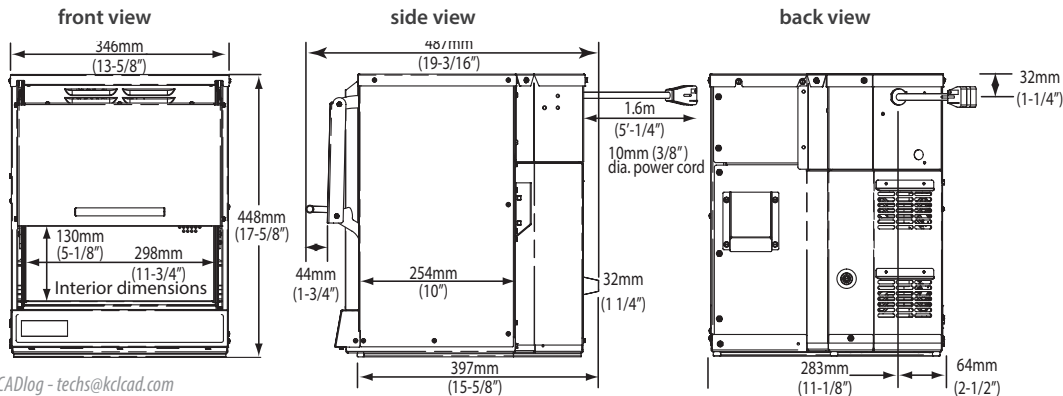

Drawings available from KCL CADlog - techs@kclcad.com

Dimensions

Exterior	H 448 (17 5/8")	W 346 (13 5/8")	D† 487 (19 3/16")
Cavity	H 130 (5 1/8")	W 298 (11 3/4")	D 216 (8 1/2")
Usable Cavity Space	8.4 liter (.3 cubic ft.)		
Door Depth	N/A - vertical pop-up		
Installation Clearance	Top: 51 (2")	Sides: 25 (1")	Back: None
Shipping Carton	H 524 (20 5/8")	W 432 (17")	D 559 (22")

Weight

Product Weight	Ship weight (approx.)	UPS Shippable
32 kg (70 lbs)	33 kg (73 lbs)	Yes, ISTA 3A approved small parcel

Features

Configuration	Countertop or Overshelf
Stackable	Yes
Display	LED
USB Port	No
Control System	Touchpad
Programmable Control	Yes, 10 pads
Braille	Overlay available
Settings Programmable	100
Max. Cooking Time	10:00
Microwave Distribution	Rotating antennas, top and bottom
Power Levels	11
Defrost	Yes, power level 2
Time Entry Option	Yes
Multiple Portion Setting	N/A
Stage Cooking	4 stages
Interior Light	No
Air Filter	Yes
Signal	Door automatically opens at end of cycle
Door Opening	Automatic opening
Exterior Finish	Stainless steel
Interior Finish	Stainless steel

Electrical Configuration

Region	Model#/UPC	Automatic Voltage Sensor	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
North America single phase	MOC24 728028020717	Yes	3100W	2400W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	1.5m (5 ft.)	2450MHz	2
EMEA, APAC, LATAM single phase	MOC5241 705105607306	No	3100W, 14.9A	2400W*	230-240V, 50Hz, 16A, single phase	CEE 7/7 "Schuko"	1.5m (5 ft.)	2450MHz	2
EMEA (UK), APAC single phase	MOC5201U 728028244533	No	2650W, 13A	2000W*	230-240V, 50Hz, 13A, single phase	BS1363	1.5m (5 ft.)	2450MHz	2
Argentina single phase	MOC5241R 728028422993	No	3200W	2400W*	230-240V, 50Hz, 20A, single phase	IRAM 2073	1.5m (5 ft.)	2450MHz	2
Australia single phase	MOC5241A 728028422719	No	3100W, 14.9A	2400W*	230-240V, 50Hz, 15A, single phase	Type 1 Australia	1.5m (5 ft.)	2450MHz	2
Brazil single phase	MOC24B 728028244465	No	3100W	2400W*	220V, 60Hz, 20A, single phase	YP-05	1.5m (5 ft.)	2450MHz	2
India single phase	MOC5241I 728028316049	No	3100W, 14.9A	2400W*	230V, 50Hz, 16A, single phase	BS546	1.5m (5 ft.)	2450MHz	2
Japan single phase	MOC5200 728028244663	No	2650W, 13.25A	2000W*	200V, 50Hz, 16A, single phase	20 A Twist Lock	1.5m (5 ft.)	2450MHz	2
Japan single phase	MOC6200 728028244670	No	2650W, 13.25A	2000W*	200V, 60Hz, 16A, single phase	20 A Twist Lock	1.5m (5 ft.)	2450MHz	2



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271402

Updated 12/2/2022

© 2022 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: