

HOJECL#.			
Item #:			





### Value Line | Low Volume This category of microwave oven is ideal for...

## **Applications**

- Convenience Stores
- Dessert stations
- · Coffee shops Teachers/Staff lounge
- Nurses stations
- Vendina

#### Boost heats and re-therms foods in seconds

- Slice of apple pie re-therms in 20 seconds
- 9 oz. (255g) cup of chili re-therms in 1:45

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking



# Low Volume

# Amana® Commercial Microwave RMS Series

#### **Power Output**

- 1000 watts of power
- Perfect replacement for inappropriate domestic ovens used in foodservice applications

#### **Available with Touch or Dial Controls**

- Touch controls:
  - 20 programmable menu items simplifies cooking
  - 5 power levels and 4 cooking stages for cooking flexibility
  - Multiple quantity pad calculates the proper cooking times for multiple portions
- Dial Controls:
  - Timer automatically resets to zero if door is opened during heating
  - 6 minute digital timer lights up for "at-a-glance" monitoring
  - Full power only for simple operation

#### Easy to Use

- See-through door and lighted interior for monitoring without opening the door
- 0.8 cubic foot (23 liter) capacity accommodates a 12" (305mm) platter, prepackaged foods and single servings

#### **Certified Oven for Commercial Applications**

- Tested to higher standards for a commercial rating —required by most commercial insurance polices and health inspectors
- Interlock safety switch is tested to 4 times the standard of residential ovens
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures
- · Compared to a residential oven, this oven is more powerful for faster heating and better quality results
- Engineered for a simple, "self-service" operation

#### Easy to Maintain

- Stainless steel exterior wrap, door, and oven interior for increased durability
- · Sealed-in Borosilicate Glass shelf for easy cleaning

#### Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center



#### Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

# **Safety and Sanitation**


This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, and FDA.









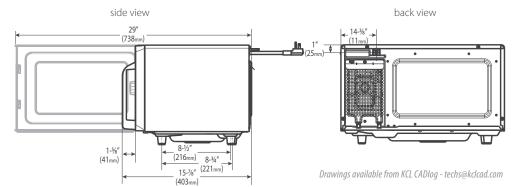

Dimensions							
Exterior	H 1	2 1/4" (310)	W 20 1/8" (512)		D† 15 %" (403)		
Cavity	H 7	34" (197)	W 13" (330)		D 13" (330)		
Usable Cavity Space	0.8	0.8 cubic ft. (23 liter)					
Door Depth	29"	29" (738), 90°+ door open					
Installation Clearances		o: 7" (177.8)	Sides: 1" (25)		Back: None		
Shipping Carton ⊢		5" (381)	W 23" (584)		D 18" (457)		
Weight							
Product Weight		Ship weight (approx.)			UPS Shippable		
30 lbs. (13.6 kg.)		37 lbs. (16.8 kg.)		Yes			

## **Optional Accessories**

- Oven cavity shelf (SE10)
- Non-stick baskets (TB10/S, SB10/S, MB10/S)

Measurements are US Standard. Measurements in ( ) are in millimeters

\* IEC 60705 Tested

† Includes handle

Features						
	Touch Models (TS)	DIal Models (DS)				
Configuration	Countertop	Countertop				
Stackable	No	No				
Display	LED	Lighted Dial				
Control System	Touchpad	Dial				
Programmable Control	Yes, 10 pads	No				
Braille	Overlay available	No				
Settings Programmable	20	-				
Max. Cooking Time	30:00	6:00				
Microwave Distribution	Rotating stirrer, bottom	Rotating stirrer, bottom				
Power Levels	5	1				
Defrost	Yes, 20% power	No				
Time Entry Option	Yes	Yes				
Multiple Portion Setting	Yes, X2	No				
Stage Cooking	4 stages	1 stage				
Interior Light	Yes, LED, 42lm	Yes, LED, 42lm				
Automatic Voltage Sensor	No	No				
Air Filter	No	No				
Signal	End of cycle, adjustable	End of cycle				
Door Handle	Grab & Go	Grab & Go				
Exterior Finish	Stainless steel	Stainless steel				
Interior Finish	Stainless steel	Stainless steel				

Electrical Configuration										
Region	Model#/ UPC	Control System	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	on	Cord Length	Frequency	Magnetron
North America single phase	<b>RMS10TSA</b> 728028470208	Touch	1500 W, 13A	1000 W*	120 V, 60 Hz, 15 A, single phase	NEMA 5-15		5 ft. (1.5m)	2450MHz	1
North America single phase	<b>RMS10DSA</b> 728028470239	Dial	1500 W, 13A	1000 W*	120 V, 60 Hz, 15 A, single phase	NEMA 5-15		5 ft. (1.5m)	2450MHz	1